

Agilent N6700 MPS Low-Profile Modular Power System

Models: N6700A, N6710A, N6721A-29A, N6731A-35A,
N6742A-45A, N6751A, N6752A, N6761A, N6762A

Product Overview



- Ideal for ATE systems in R&D, Design Validation, and Manufacturing
- Small size: up to 4 outputs in 1U of rack space
- Flexible, modular system: Can mix and match power levels and performance levels to optimize investment
- Performance modules for critical test requirements
- Value modules for basic DC power requirements
- Fast command processing times to improve throughput
- Connect via GPIB, LAN, or USB



Agilent Technologies

Small Size and Flexibility for ATE

Power supplies are a fundamental component of every test system in industries including aerospace and defense, consumer electronics, computers and peripherals, communications, semiconductor and automotive electronics. Today's complex automatic test equipment (ATE) systems often require multiple power sources. Test system designers are challenged to keep costs down by reducing rack space occupied by these multiple power supplies and to continually increase test system throughput.

The Agilent N6700 Low-Profile Modular Power System (MPS) is a 1U (rack unit) high, multiple-output programmable DC power supply system that enables test system integrators to optimize performance, power and price to match test needs.

The Agilent N6700 MPS gives test system designers the flexibility to mix and match from 13 different DC power modules to create a 1- to 4-channel DC power system optimized to meet specific test requirements. Test system engineers can invest in high-performance outputs where speed and accuracy are needed, or purchase basic performance outputs for simple DC power requirements.

N6700 System Features



Figure 1. Connectivity: GPIB, 10/100 Base-T Ethernet, and USB 2.0 all standard

Small Size

The Agilent N6700 MPS uses an advanced switching power supply design that fits within 1U of rack space. It has side air vents (no top or bottom air vents) so other instruments can be mounted directly above or below it. (Requires rack mount kit; see Ordering Information.)

Built-in Measurement of Voltage and Current

The N6700 modules come standard with built-in measurement of voltage and current to simplify wiring and design of an ATE system.

Protection Features

Each N6700 module is protected against over-voltage, over-current, and over-temperature. A fault condition in one module can be detected within 10 microseconds by other modules so that they can be quickly shut down to avoid hazardous conditions on your DUT.

Connectivity

The N6700 MPS comes standard with GPIB, USB 2.0, and 10/100 Base-T Ethernet LAN interfaces. While GPIB is best suited for use with existing systems, Agilent offers USB and LAN to allow you to take advantage of the availability, speed, and ease-of-use of common computer industry standard interfaces.

Security

When used in systems running GPIB, the LAN and/or USB interfaces can be disabled for extra security. Also, all non-volatile RAM data and settings can be cleared from the front panel.

Control from any Browser

The N6700 can be controlled via a standard web browser. The N6700 contains a web server that provides web pages for monitor, control, and setup of the MPS.

Output Sequencing

Each DC power module can be individually set to turn on or to turn off with a delay. By adjusting the delay times and then commanding the N6700 to turn on, you can set the N6700 modules to sequence on in a particular order. The same sequencing capability is available to shut down the modules in a particular order.

Series and Parallel Operation

To increase available voltage and power, similarly rated outputs can be operated directly in series. To increase available current and power, similarly rated outputs can be operated directly in parallel.

Triggering

The N6700A Low-Profile MPS mainframe has hardware trigger in/trigger out signals which permit the N6700 to be synchronized with external events. For example, a switch closure in the fixture can trigger the N6700 to turn on power to the DUT, or change voltage, or take a measurement.

Drivers

The N6700 comes with both VXI*plug&play* drivers and IVI-COM drivers.

Programming Language

The N6700 supports SCPI (Standard Commands for Programmable Instruments).

Output Disconnect Relays

Each module in the N6700 can be individually ordered with optional Output Disconnect Relays. These relays disconnect both the plus and minus side of the power supply, including the sense leads.

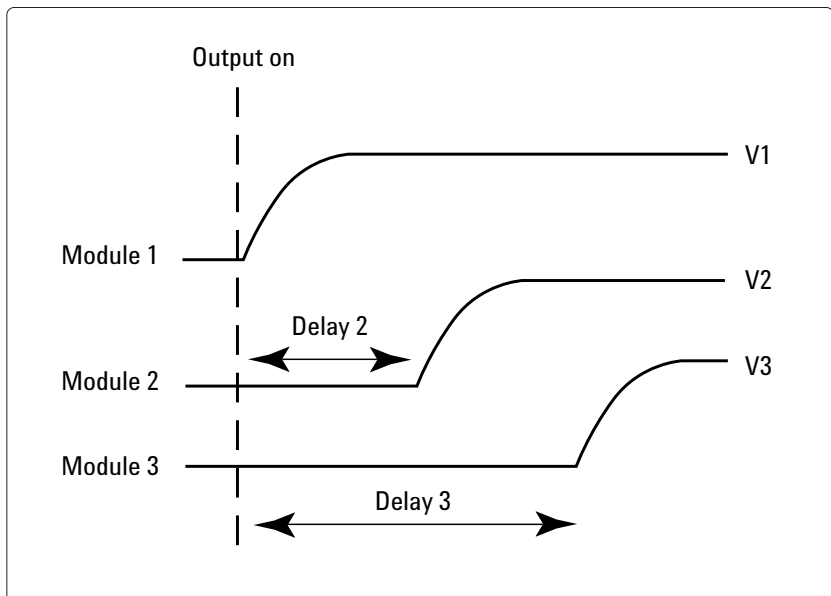


Figure 2. Output Sequencing



Figure 3. Front panel with up to 4 channels displayed simultaneously (Picture shows 3 channels installed.)

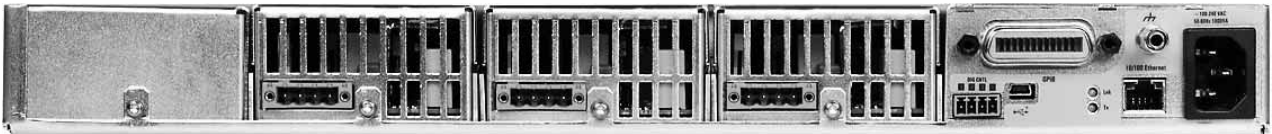


Figure 4. Rear panel (Picture shows 3 channels installed.)

Front Panel

In addition to full control over its three standard interfaces, the N6700 has a full featured front panel to permit easy manual operation for test prototyping, debugging, and troubleshooting when used in an ATE system. You can have confidence that the N6700 is working properly because you can view the settings and actual output values on all four outputs at the same time.

Universal AC Input

The N6700 has a universal input that operates from 100-240 Vac, 50/60 Hz. There are no switches to set or fuses to change when switching from one voltage standard to another. The AC input employs power factor correction.

Quick Disconnects

Each power module has quick disconnects for easy system setup and maintenance.

Rack Mount Kit

The N6700 is easily rack-mounted using available option #908. This kit provides all the necessary hardware to rack mount one N6700A mainframe in only

1U of rack space. This rack mount kit includes front rack ears and rear supports which take the place of standard rack rails and/or slides. Note that standard rack rails or slides are not needed and are not compatible with the N6700A because of its 1U size and airflow requirements.



Figure 5. Quick disconnects for power and sense leads

Choosing the right DC Power Modules to meet your ATE needs



N6750 Family

For applications where the power supply plays a critical role

The Agilent N6750 family of high-performance, autoranging DC power modules provides low noise, high accuracy and programming speeds that are up to 10 to 50 times faster than other programmable power supplies. In addition, Agilent has, for the first time, included high-speed test extensions in general-purpose power supplies. The high-speed test extensions offer an oscilloscope-like digitizer that simplifies system configuration and increases

measurement accuracy when viewing high-speed transient or pulse events within the device-under-test (DUT). In addition, autoranging output capabilities enable one power supply to do the job of several traditional power supplies.



N6760 Family

For applications where precision is required

The Agilent N6760 family of precision DC power modules provides precise control and measurements in the milliamperere and microampere region with the ability to simultaneously digitize voltage and current, and capture those measurements in an oscilloscope-like data buffer.



N6730/40 Family

For basic DC applications

The Agilent N6730 and N6740 families of DC power modules provide programmable voltage and current, measurement and protection features at a very economical price, making these modules suitable to power the DUT or to provide power for ATE system resources, such as fixture control.

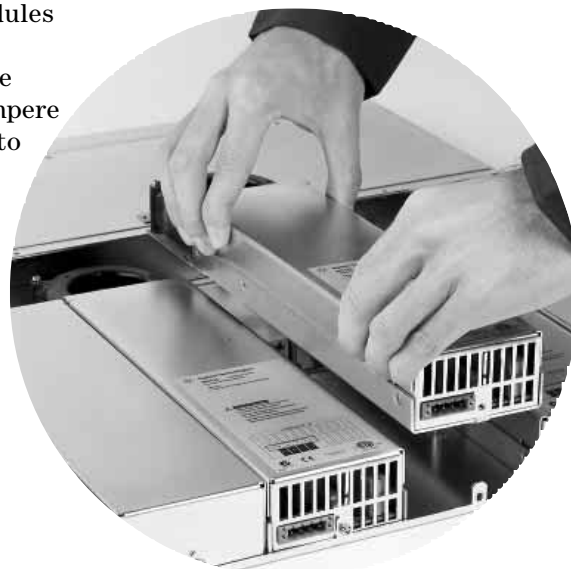


Figure 6. User re-configurable modular system

The N6750 and N6760 Families: Performance Modules for when the power supply is a critical part of your testing

When your testing requires a power supply to do more than just provide a constant DC level, the N6750 family of High-Performance, Autoranging DC Power Modules and the N6760 family of Precision DC Power Modules are the perfect fit. These modules combine a fast output with flexible controls and sophisticated measurements. The N6750/60 is more than a power supply; it is a stimulus/response instrument.

To fit in 1U, the N6750/60 use an advanced switch-mode design that offers the low output noise and fast output speed typically found on linear power supplies.

Low Noise Outputs

Careful attention has been paid to this design to ensure low normal mode noise (ripple and peak-peak) as well as low common mode noise. This switching power supply outperforms most linear power supplies on the market.

Output Programming Speed


When it comes to speed, the N6750/60 achieves performance unlike a typical DC power supply. Thanks to an active down-programming circuit to rapidly pull down the output when lowering the module's output voltage, the N6750/60 can rapidly program both up and down in voltage. Changing voltage from 0 V to 50 V, or 50 V to 0 V, can be accomplished in less than 5 milliseconds. And for smaller voltage changes, for example from 0 V to 5 V or 5 V to 0 V, the programming speed is less than 500 microseconds. These output speeds allow the N6750/60 to give maximum system throughput when your test calls for frequent changes in power supply voltage settings.

Autoranging for Flexibility

The N6750/60 gives test system designers even more flexibility by providing autoranging outputs. This autoranging capability provides maximum output power at any output voltage up to 50 V. This allows one power supply to do the job of several power supplies because its operating range covers low voltage, high current as well as high voltage, low current operating points.

For example, the N6751A High-Performance, Autoranging DC Module, rated at 50 V, 5 A, and 50 W can provide full power at 10 V @ 5 A (=50 W), 20 V @ 2.5 A (= 50 W), 33.3 V @ 1.5 A (= 50 W), 50 V @ 1 A (= 50 W) or anywhere in between. Therefore, this 50 W autoranging power supply, due to its extended voltage and current range, can produce voltage and current combinations in the range of a 250 W non-autoranging power supply.

The flexibility of autoranging is useful when the DUT operates over a wide range of voltages, when the ATE system needs to test a wide range of DUTs, or when margin is needed because the ATE power supply must be selected before final DUT power requirements are determined.

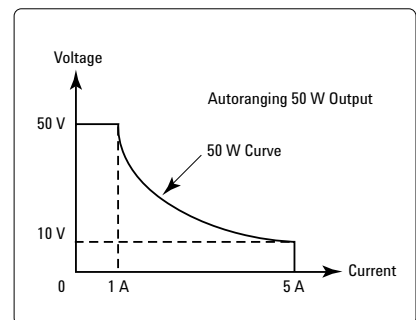

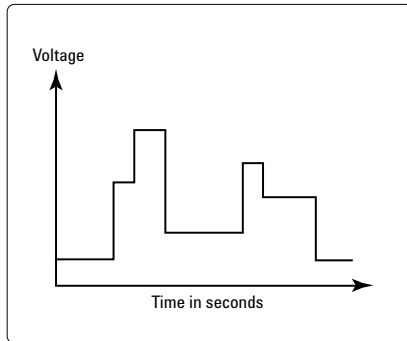


Figure 7. High Speed Test Extensions LIST mode provides “power ARB” capability

High-Speed Test Extensions

To make your testing go even faster, the N6750/60 offer High-Speed Test Extensions (HSTE). This enhancement to the N6750/60 DC Power Modules extends the capabilities to include features similar to a built-in arbitrary waveform generator and a built-in oscilloscope.

Through the LIST mode of HSTE, you can download up to 512 setpoints of voltage and current. In LIST mode, you can program the output to execute a LIST of voltage and current setpoints. For each setpoint, a dwell time can be specified and the power supply will stay (i.e., dwell) at that setpoint for the programmed dwell time value. For each setpoint in the LIST, you can have a different dwell time from 0 to 262 seconds with 1 microsecond resolution.* Then, you can trigger the module to begin executing the list. The module will step thru the list, staying at each setpoint for the programmed dwell time,

and then it will move on to the next point. This speeds up execution by removing the computer I/O from the process. The result is an output that automatically changes according to the programmed list, just like an arbitrary waveform generator.

** Note that the output response time is less than 5 milliseconds per voltage change, so steps of less than 5 milliseconds will not achieve their final output voltage value before moving on to the next step. This is useful when trying to create a smooth waveform.*


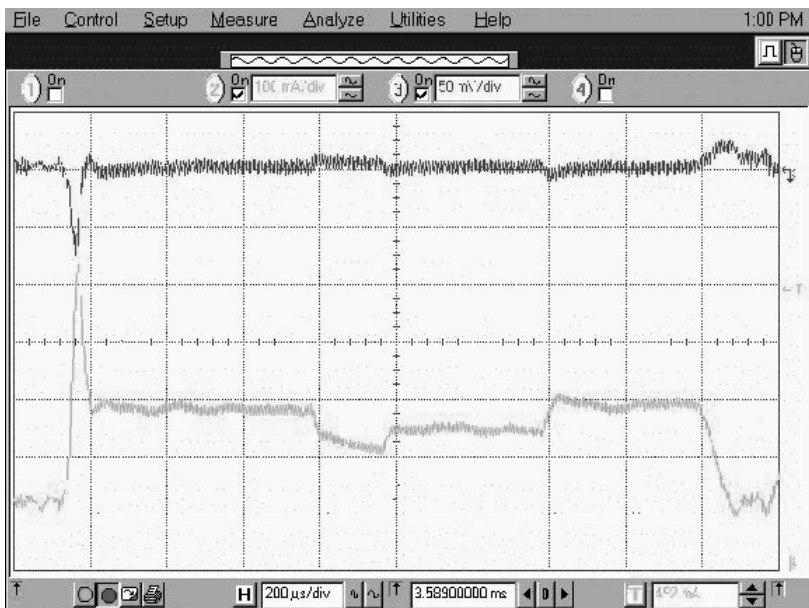


Figure 8. High Speed Test Extensions Digitizer adds “oscilloscope-like” data capture

While some applications require fast risetime and/or falltimes, some devices can actually be harmed by a power supply that is too fast. For these cases, the LIST mode of the N6700 can be used to “slow down” the output. For this application, you create a slow ramp of output voltage by dividing the total voltage excursion into a smaller number of steps and dwell at each step for some amount of time. For example, let’s say you need to go from 0 V to 50 V in 500 milliseconds. For this case, the output programming response time specification of 5 milliseconds is too fast. To slow down the output, you could use LIST mode and program 50 steps of 1 volt per step, and dwell at each step for 10 milliseconds. The result will be a ramp from 0 V to 50 V in 500 milliseconds.

HSTE also provides an oscilloscope-like digitizer built into the power module to capture voltage and current measurements of up to 4096 points at up to 50,000 measurements per second. For applications such as

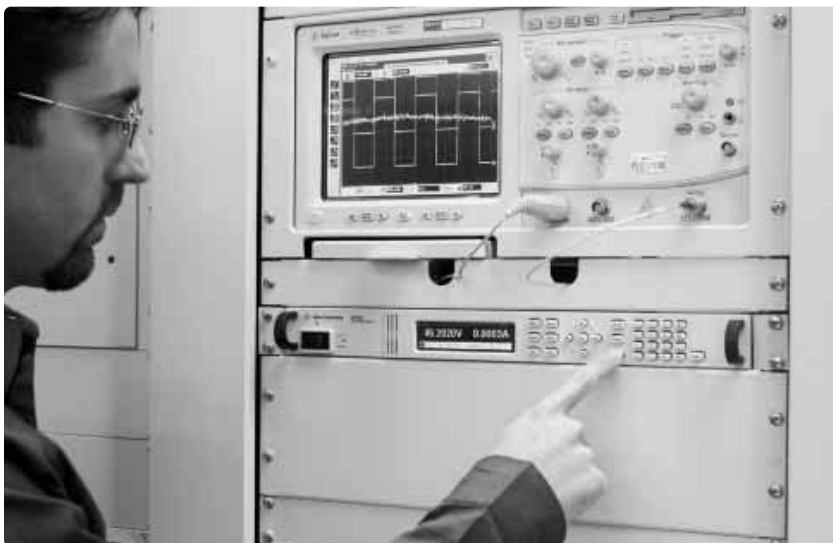

design validation of battery powered digital devices, the ability to capture dynamic information about the current flowing into the DUT allows designers to better understand the current drain on DUT batteries and optimize DUT power management during normal DUT operation and in DUT standby mode.

The digitizer can also be synchronized with changes in the output. For example, the digitizer can make measurements in response to a trigger generated by a change in output voltage caused by LIST mode.

In this configuration, you can ensure that measurements are made at the right moment during each step of an executing LIST. This is particularly useful if you are trying to measure current consumption during a rapidly changing voltage stimulus, such as current drawn during a pulsed output voltage.

Precision Low-level Performance

The N6760 family of Precision DC Power Modules additionally provide dual ranges on both programming and measurement. In the low range, these power supplies provide precision in the milliampere and microampere regions. They are ideally suited for semiconductor and passive device testing, or where a precisely controlled output and highly accurate, precise measurements are needed during test.

If you are using Agilent Multiple-Output System DC Power Supplies Now

Models

6621A, 6622A, 6623A,

6624A, 6625A, 6626A,

6627A, 6628A, 6629A

If you would like to take advantage of the size and speed of the N6700, Agilent offers preconfigured N6700 Modular Power Systems to replace Agilent 662xA Power Supplies. Rather than ordering an N6700 system with multiple options for modules, to simplify ordering, the N672xA model numbers are available as single model number preconfigured replacements. See ordering information at the end of this data sheet.

To assist in converting from Agilent 662x to the N6700, please refer to “Application Note 1467—How to use the Agilent N67xxA Modular Power System to replace an Agilent 662xA”. Look for literature part number 5989-0466EN at www.agilent.com/find/N6700

The N6730 and N6740 Families: Basic Modules when you just need a simple power supply

Not all applications require high performance power supplies. When your budget is tight, and when speed and accuracy are a low consideration, the Agilent N6700 Low-Profile MPS supports basic DC power modules that provide an economical solution. The N6730 and N6740 families give you clean, reliable DC power without advanced features.

The Agilent N6730 family of 50 W DC Power Modules and the N6740 family of 100 W DC Power Modules provide the following:

- Fully programmable Constant Voltage/Constant Current DC Source
- Remote sensing for accurate control of output voltage when voltage drops in the leads are present
- Built-in measurements of voltage and current
- Protection (over-voltage over-current, and over-temperature) against damage to your DUT or to the power module

- Performance (programming accuracy, measurement accuracy, noise) suitable for most common DC power applications
- Built-in optional output disconnect relays, which break both the power and the sense leads, to simplify system wiring

Use the N6730/40 in Place of Fixed-output DC Power Supplies

Many ATE systems have complex fixtures that contain indicator lights, relays or active circuits (like sensors, triggers, amplifiers) to facilitate testing of the DUT. These circuits need DC power, too. One solution for powering these ATE system resources would be to purchase a fixed-output DC source. However, there are considerations when integrating a fixed output DC source into an ATE system.

The table below illustrates these points and how it may be easier, faster, and more economical to purchase an N6730/40 programmable DC Power Module in place of a fixed-output DC Power Supply.

All the benefits of the N6700 MPS at a low price

While the N6730/40 are economical solutions to basic DC power requirements, they are also part of the N6700 MPS. Therefore, while saving, you still have the benefits of:

- Small size (true 1U)
- Mix-and-match with other N6700 DC Power Modules when you need performance along with basic DC outputs
- Connectivity via LAN, USB, and GPIB
- Fast command processing time of less than 1 ms
- Remote control over internet via standard web browser
- Friendly front panel
- Optional output disconnect relays

Factor	Consideration When Using a Fixed-Output DC Power Supply	Solution Using N6730/40 DC Power Modules in N6700 MPS
Control the output	You may want some limited control over this DC source (on/off).	The N6730/40 is fully controllable over LAN, USB, GPIB
Monitor the output	You may want to be able to monitor the voltage or current to ensure proper operation, which would require wiring to a system DMM.	The N6730/40 has built-in measurements of voltage and current, eliminating the need for wiring to a system DMM.
Mounting the power supply	You will need to mount the power supply in the ATE system. Finding a safe location can be a challenge. Some system designers will build a “drawer” or “tray” for holding power supplies. However, this adds extra design time, fabrication costs, installation costs, and occupies rack space.	The N6730/40 are compact modules integrated into a 1U rack mountable mainframe. There is no need to design or build any custom mounting hardware.
Safety	You may want to provide a safety interlock to this DC source. This would require control (on/off) and a means to detect the interlock condition.	The N6730/40 have hardware inputs for remote on/off that can be directly connected to a safety interlock system.

Performance Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 55°C, and derated above 40°C.

		N6751A / N6752A	N6761A / N6762A
DC Output Ratings			
	Voltage	50 V	50 V
	Current	5 A / 10 A	1.5 A / 3 A
	Power	50 W / 100 W	50 W / 100 W
Output Ripple and Noise (PARD) (from 20 Hz – 20 MHz)			
	CV peak-to-peak ¹	6 mV	6 mV
	CV rms	1 mV	1 mV
Load Effect (Regulation)²			
	Voltage	2 mV	0.5 mV
	Current	2 mA	30 µA
Source Effect (Regulation)			
	Voltage	1 mV	1 mV
	Current	1 mA	30 µA
Programming Accuracy³ (at 23 °C ±5 °C after a 30 minute warm-up)			
	Voltage high range	0.06% + 19 mV	0.016% + 6 mV
	Voltage low range (≤ 5.5 V)	N/A	0.016% + 1.5 mV
	Current high range	0.1% + 20 mA	0.04% + 200 µA
	Current low range (≤ 100 mA)	N/A	0.04% + 15 µA
Measurement Accuracy (at 23 °C ±5 °C)			
	Voltage high range	0.05% + 20 mV	0.016% + 6 mV
	Voltage low range (≤ 5.5 V)	N/A	0.016% + 1.5 mV
	Current high range	0.1% + 4 mA	0.03% + 200 µA
	Current low range (≤ 100 mA)	N/A	0.03% + 15 µA
Load Transient Recovery Time (time to recover to within the settling band following a load change)			
<ul style="list-style-type: none"> • from 60% to 100% and from 100% to 60% of full load for models N6751A & N6761A • from 50% to 100% and from 100% to 50% of full load for models N6752A & N6762A. 			
	Voltage settling band	± 75 mV	± 75 mV
	Time	< 100 µs	< 150 µs

¹ For typical values, see Supplemental Characteristics.

² With an output change from no load to full load, up to a maximum load-lead drop of 1 V per lead.

³ Applies from minimum to maximum programming range. (see Supplemental Characteristics)

Performance Specifications (Continued)

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 55°C, and derated above 40°C.

		N6731A	N6732A/ N6742A	N6733A/ N6743A	N6734A/ N6744A	N6735A/ N6745A
DC Output Ratings						
	Voltage	5 V	8 V	20 V	35 V	50 V
	Current	10 A	6.25 A / 10 A	2.5 A / 5 A	1.5 A / 3 A	0.8 A / 1.6 A
	Power	50 W	50 W / 80 W	50 W / 100 W	52.5 W / 105 W	40 W / 80 W
Output Ripple and Noise (PARD) (from 20 Hz – 20 MHz)						
	CV peak-to-peak	10 mV	12 mV	14 mV	15 mV	20 mV
	CV rms	2 mV	2 mV	3 mV	5 mV	9 mV
Load Effect (Regulation)¹						
	Voltage	2 mV	2 mV	2 mV	4 mV	6 mV
	Current	2 mA	2 mA	2 mA	2 mA	2 mA
Source Effect (Regulation)						
	Voltage	1 mV	2 mV	2 mV	4 mV	6 mV
	Current	1 mA	1 mA	1 mA	1 mA	1 mA
Programming Accuracy² (at 23 °C ±5 °C after a 30 minute warm-up)						
	Voltage	0.1% + 19 mV	0.1% + 19 mV	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV
	Current	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA	0.15% + 20 mA
Measurement Accuracy (at 23 °C ±5 °C)						
	Voltage	0.1% + 20 mV	0.1% + 20 mV	0.1% + 20 mV	0.1% + 35 mV	0.1% + 60 mV
	Current	0.15% + 20 mA	0.15% + 10 mA	0.15% + 5 mA	0.15% + 4 mA	0.15% + 4 mA
Load Transient Recovery Time (time to recover to within the settling band following a load change from 50% to 100% and from 100% to 50% of full load.)						
	Voltage settling band	± 80 mV	± 80 mV	± 200 mV	± 200 mV	± 200 mV
	Time	200 μs	200 μs	200 μs	200 μs	200 μs

¹ With an output change from no load to full load, up to a maximum load-lead drop of 1 V per lead.

² Applies from minimum to maximum programming range. (see Supplemental Characteristics)

Supplemental Characteristics

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing. All characteristics are typical unless otherwise noted.

	N6751A / N6752A	N6761A / N6762A
Programming Ranges		
Voltage high range	20 mV – 51 V	15 mV – 51 V
Voltage low range (≤ 5.5 V)	N/A	12 mV – 5.5 V
Current high range	10 mA – 5.1 A/10 mA – 10.2 A	1 mA – 1.53 A/1 mA – 3.06 A
Current low range (≤ 0.1 A)	N/A	0.1 mA – 0.1 A
Programming Resolution		
Voltage high range	3.5 mV	880 μ V
Voltage low range (≤ 5.5 V)	N/A	90 μ V
Current high range	3.25 mA	60 μ A
Current low range (≤ 0.1 A)	N/A	2 μ A
Measurement Resolution		
Voltage high range	1.8 mV	440 μ V
Voltage low range (≤ 5.5 V)	N/A	44 μ V
Current high range	410 μ A	30 μ A
Current low range (≤ 0.1 A)	N/A	1 μ A
Programming Temperature Coefficient per $^{\circ}$C		
Voltage high range	18 ppm + 160 μ V	18 ppm + 140 μ V
Voltage low range (≤ 5.5 V)	N/A	40 ppm + 70 μ V
Current high range	100 ppm + 45 μ A	33 ppm + 10 μ A
Current low range (≤ 0.1 A)	N/A	60 ppm + 1.5 μ A
Measurement Temperature Coefficient per $^{\circ}$C		
Voltage high range	25 ppm + 35 μ V	23 ppm + 40 μ V
Voltage low range (≤ 5.5 V)	N/A	30 ppm + 40 μ V
Current high range	60 ppm + 3 μ A	40 ppm + 0.3 μ A
Current low range (≤ 0.1 A)	N/A	50 ppm + 0.3 μ A
Load Cross Regulation		
Voltage, from no load to full load	1 mV	0.5 mV
Current, from no load to full load	1 mA	5 μ A
Output Ripple and Noise (PARD)		
Typical CV peak-to-peak	4 mV	4 mV
CC rms	2 mA	2 mA
Common Mode Noise (from either output to chassis)		
rms (20 Hz - 20 MHz)	500 μ A	500 μ A
peak-to-peak (20 Hz - 20 MHz)	< 2 mA	< 2 mA
Over-voltage Protection		
Accuracy	0.25% + 250 mV	0.25% + 250 mV
Response Time	50 μ s from occurrence of 0V condition to start of output shutdown	
Down-programming Capability¹		
Continuous power	7 W	7 W
Peak current	7 A	3 A

¹ Modules can discharge a 1000 μ F capacitor from 50 V to 0 V at a rate of 4 times/second.

Supplemental Characteristics (Continued)

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing. All characteristics are typical unless otherwise noted.

	N6751A / N6752A	N6761A / N6762A
Up-programming Time with full resistive load: (time from 10% to 90% of total voltage excursion)		
Voltage setting from 0 V to 10 V	0.2 ms	0.6 ms
Voltage setting from 0 V to 50 V	1.5 ms	2.2 ms
Up-programming Settling Time with full resistive load: (time from start of voltage change to within 50 mV of final value)		
Voltage setting from 0 V to 10 V	0.5 ms	0.9 ms
Voltage setting from 0 V to 50 V	4 ms	4 ms
Down-programming Time with no load: (time from start of voltage change to output voltage < 0.5 V)		
Voltage setting from 10 V to 0 V	0.3 ms	0.3 ms
Voltage setting from 50 V to 0 V	1.3 ms	1.3 ms
Down-programming Settling Time with no load: (time from start of voltage change to output voltage within 50 mV of final value)		
Voltage setting from 10 V to 0 V	0.45 ms	0.45 ms
Voltage setting from 50 V to 0 V	1.4 ms	1.4 ms
Down-programming Time with 1000 μF load: (time from start of voltage change to output voltage < 0.5 V)		
Voltage setting from 10 V to 0 V	2.1 ms	4.5 ms
Voltage setting from 50 V to 0 V	11 ms	23 ms

Supplemental Characteristics (Continued)

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing. All characteristics are typical unless otherwise noted.

		N6731A	N6732A/ N6742A	N6733A/ N6743A	N6734A/ N6744A	N6735A/ N6745A
Programming Ranges						
	Voltage	20 mV – 5.1 V	20 mV – 8.16 V	20 mV – 20.4 V	20 mV – 35.7 V	20 mV – 51 V
	Current	10 mA – 10.2 A	10 mA – 6.375 A/ 10 mA – 10.2 A	10 mA – 2.55 A/ 10 mA – 5.1 A	10 mA – 1.53 A/ 10 mA – 3.06 A	10 mA – 0.816 A/ 10 mA – 1.63 A
Programming Resolution						
	Voltage	3.5 mV	4 mV	5 mV	9 mV	13 mV
	Current	5 mA	3.25 mA	3.25 mA	3.25 mA	3.25 mA
Measurement Resolution						
	Voltage	3 mV	4 mV	10 mV	18 mV	30 mV
	Current	10 mA	7 mA	3 mA	2 mA	1 mA
Output Ripple and Noise (PARD)						
	CC rms	8 mA	4 mA	2 mA	2 mA	2 mA
Common Mode Noise (from either output to chassis)						
	rms (20 Hz – 20 MHz)	1 mA	1 mA	1 mA	1 mA	1 mA
	peak-to-peak (20Hz - 20MHz)	< 10 mA	< 10 mA	< 10 mA	< 10 mA	< 10 mA
Over-voltage Protection						
	Accuracy	0.25% + 250 mV	0.25% + 250 mV	0.25% + 250 mV	0.25% + 250 mV	0.25% + 300 mV
	Response Time	50 μs from occurrence of 0V condition to start of output shutdown				
Maximum Up-programming and Down-programming Time with full resistive load: (time from 10% to 90% of total voltage excursion)						
	Voltage setting from 0 V to full scale and full scale to 0 V	10 ms	10 ms	10 ms	10 ms	10 ms
Maximum Up-programming and Down-programming Settling Time with full resistive load: (time from start of voltage change until voltage settles within 0.1% of the full-scale voltage of its final value)						
	Voltage setting from 0 V to full scale and full scale to 0 V	100 ms	100 ms	100 ms	100 ms	100 ms
Remote Sense Capability:						
	Outputs can maintain specifications with up to a 1-volt drop per load lead.					
Series and Parallel Operation:						
	Similarly rated outputs can be operated directly in parallel or can be connected for straight series operation. Auto-series and auto-parallel operation is not available.					

Supplemental Characteristics (Continued)

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing. All characteristics are typical unless otherwise noted.

N6700A MPS Mainframe

Output Response Characteristics		
Command processing time		≤ 1 ms from receipt of command to start of the output change
Protection Response Characteristics		
Inhibit Input		5 μs (from receipt of inhibit to start of shutdown)
Fault on coupled outputs		< 10 μs (from receipt of fault to start of shutdown)
Digital Control Characteristics		
Maximum voltage ratings		+16.5 VDC/-5 VDC between pins (pin 4 is internally connected to chassis ground).
Pins 1 and 2 as FLT output		Maximum low-level output voltage = 0.5 V @ 4 mA Maximum low-level sink current = 4 mA Typical high-level leakage current = 0.14 mA @ 16.5 VDC
Pins 1, 2, 3 as digital/trigger outputs (pin 4 = common)		Maximum low-level output voltage = 0.5 V @ 4 mA; 1 V @ 50 mA; 1.75 V @ 100 mA Maximum low-level sink current = 100 mA Typical high-level leakage current = 0.12 mA @ 16.5 VDC
Pins 1, 2, 3 as digital/trigger inputs and pin 3 as INH input (pin 4 = common)		Maximum low-level input voltage = 0.8 V Minimum high-level input voltage = 2 V Typical low-level current = 2 mA @ 0 V (internal 2.2k pull-up) Typical high-level leakage current = 0.12 mA @ 16.5 VDC
Interface Capabilities		
GPIB		SCPI - 1993, IEEE 488.2 compliant interface
USB 2.0		Requires Agilent I/O Library version M.01.01.04
10/100 LAN		Requires Agilent I/O Library version L.01.01
Web server		Built-in Web server - requires Internet Explorer 5+ or Netscape 4.x
Environmental Conditions		
Operating environment		Indoor use, installation category II ¹ , pollution degree 2
Temperature range		0°C to 55°C (output derated above 40°C)
Relative humidity		Up to 95%
Altitude		Up to 2000 meters
Storage temperature		-30°C to 70°C

¹Category II for AC input.

Supplemental Characteristics (Continued)

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or type testing.

All characteristics are typical unless otherwise noted.

N6700A MPS Mainframe

Regulatory Compliance		
EMC		Complies with the European EMC directive 89/336/EEC for Class A test and measurement products. Complies with the Australian standard and carries the C-Tick mark. This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme à la norme NMB-001 du Canada. Electrostatic discharges greater than 1 kV near the I/O connectors may cause the unit to reset and require operator intervention.
Safety		Complies with the European Low Voltage Directive 73/23/EEC and carries the CE-marking. This product also complies with the US and Canadian safety standards for test and measurement products.
Acoustic Noise Declaration		
This statement is provided to comply with the requirements of the German Sound Emission Directive, from 18 January 1991.		Sound Pressure Lp < 70 dB(A), *At Operator Position, *Normal Operation, *According to EN 27779 (Type Test). Schalldruckpegel Lp <70 dB(A) *Am Arbeitsplatz, *Normaler Betrieb, *Nach EN 27779 (Typprüfung).
Isolation		
		No output terminal may be more than 240 VDC from any other terminal or chassis ground.
AC Input		
Nominal Input Ratings		100 VAC – 240 VAC; 50/60 Hz
Input Range		86 VAC – 264 VAC
Power Consumption		1000 VA typical; 1100 VA maximum (with power factor correction)
Fuse		Internal fuse (not customer accessible)
Mainframe Dimensions		
Height:		44.45 mm; 1.75 in.
Width:		432.5 mm; 17.03 in.
Depth:		596.9 mm; 23.5 in.
Mainframe Weight		
With 4 installed modules		Net: 12.78 kg; 28 lbs.

Agilent N67xxA Option Characteristics

Output Relay Option

Mechanical relays that break conduction path on + output, - output, + sense, - sense. Relays sequenced to ensure no loss of control when sense lines are opened.

High Speed Test Extensions

List mode




- Number of steps = 1 to 512
- Dwell time = 1 μ s to 262 seconds
- Maximum list repetitions = 256, or infinite

High Speed Test Extensions


Digitizer

- Measurement points = 1 to 4096
- Sample rate = 0.000025 Hz to 50 kHz

Autoranging Characteristic

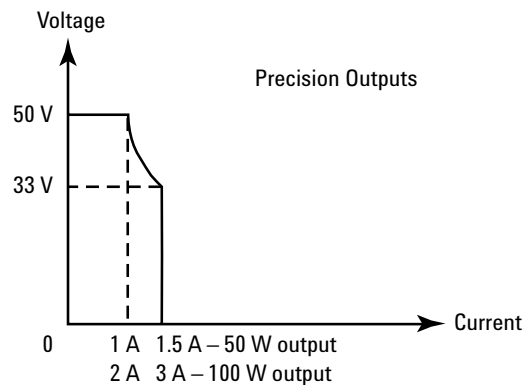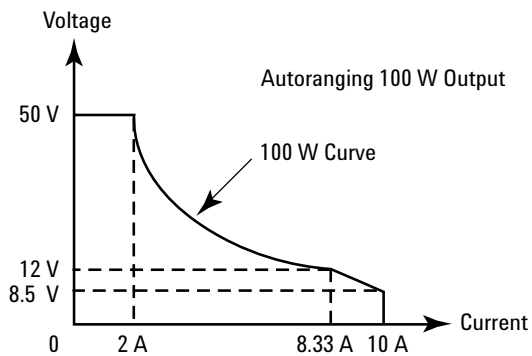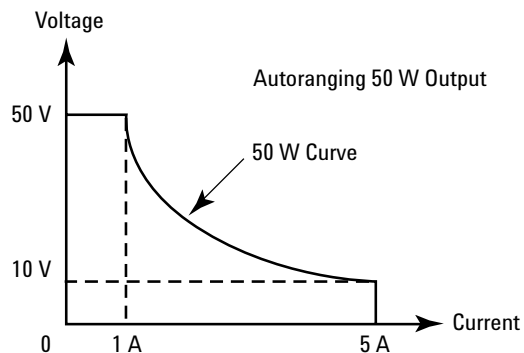

Outline Diagram

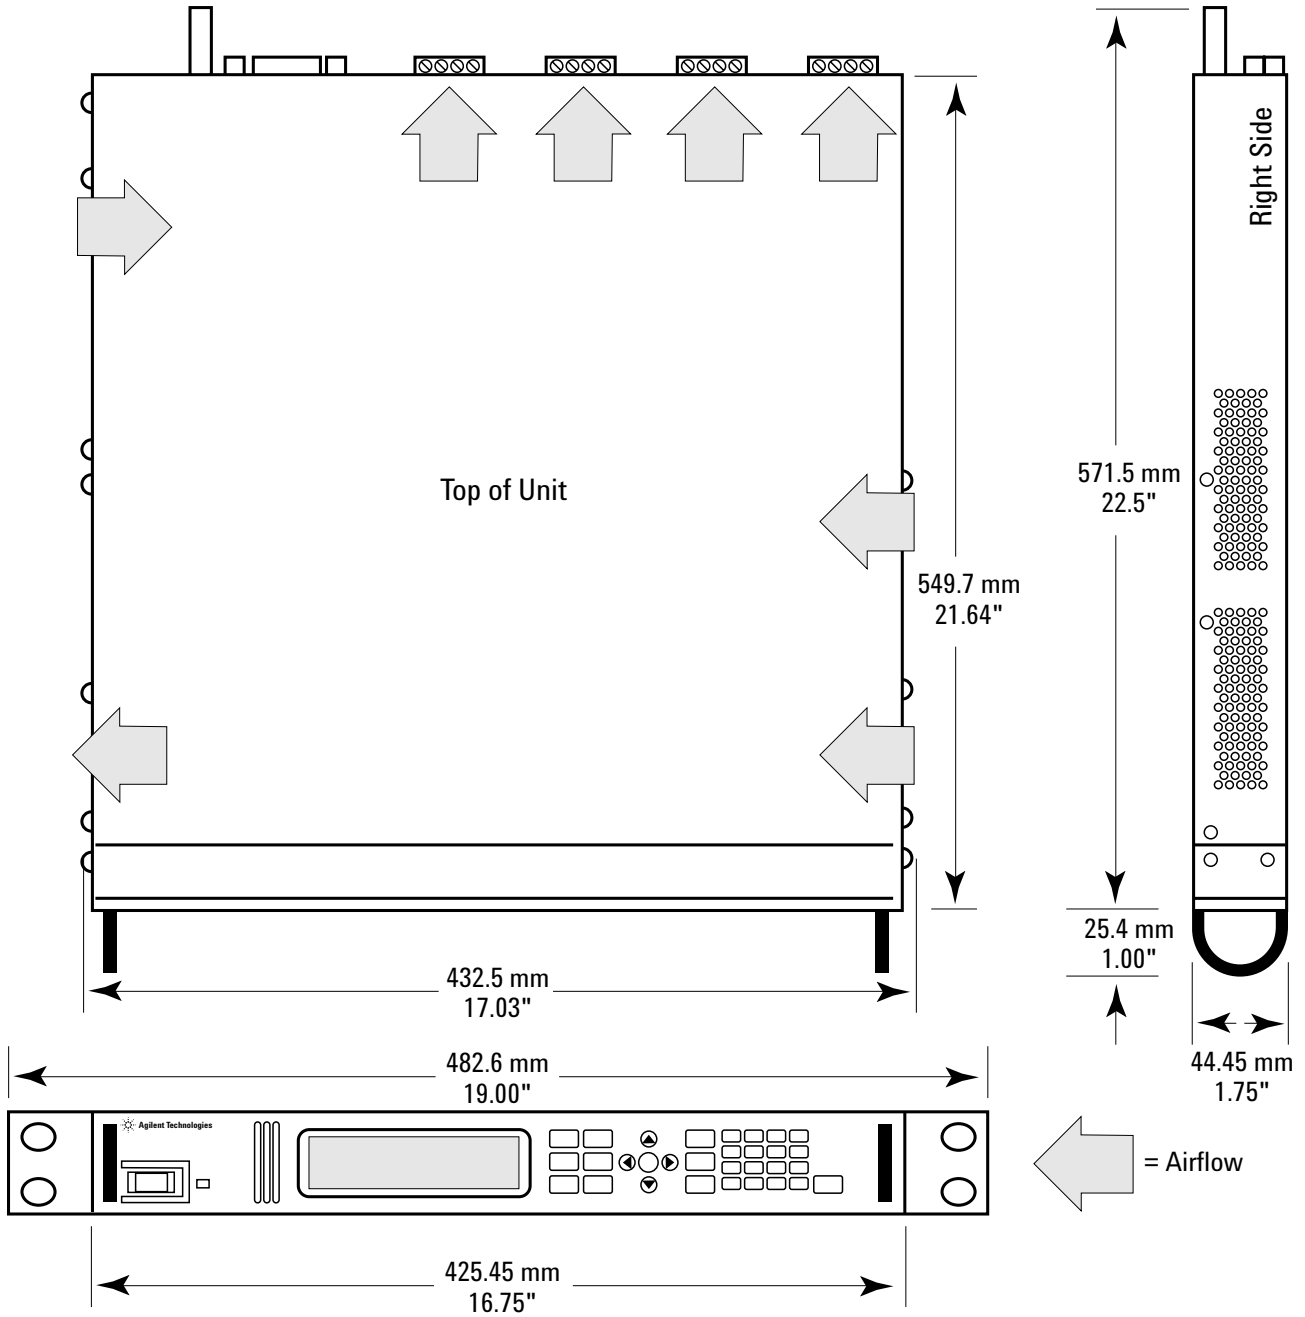

Ordering Information

N6710A Systems

To purchase an N6700 Modular Power System, order an N6710A. The N6710A is a build-to-order system that is shipped as a fully tested and assembled multiple-output power supply. Each N6710A consists of 1 N6700A mainframe plus optionally 1 to 4 modules. To specify which modules you want installed in the N6700A, modules are ordered as options to the N6710A. If you order less than 4 modules, the empty slots will be automatically filled with blank filler panels. You must order at least 1 module.

Note: Mainframes and Modules are not available as standalone products. You cannot order N6700A mainframes and N67xxA modules as separate products at this time.

N6710A System Build-to-Order Modular Power System (Consists of 1 N6700A mainframe)

Available options to N6710A

N6710A-908	Rack Mount Kit (Required for rack mounting; Standard rack mount hardware will not work.)
N6710A-0L1	Standard Documentation Kit
N6710A-0L2	Additional copy of Standard Documentation Kit
N6710A-0B0	Delete Standard Documentation Kit
N6710A-900	Power Cord, United Kingdom, P/N 8120-1351
N6710A-901	Power Cord, Australia, P/N 8120-1369
N6710A-902	Power Cord, Europe, P/N 8120-1689
N6710A-903	Power Cord, USA, Canada, P/N 8120-4383
N6710A-904	Power Cord, USA, Canada, P/N 8120-0698
N6710A-906	Power Cord, Switzerland, P/N 8120-2104
N6710A-912	Power Cord, Denmark, P/N 8120-2956
N6710A-917	Power Cord, South Africa, India, P/N 8120-4211
N6710A-918	Power Cord, Japan, P/N 8120-4753
N6710A-919	Power Cord, Israel, P/N 8120-6800
N6710A-920	Power Cord, Argentina, P/N 8120-6869
N6710A-921	Power Cord, Chile, P/N 8120-6980
N6710A-922	Power Cord, China, P/N 8120-8376
N6710A-927	Power Cord, Thailand, P/N 8120-8871
N6710A-UK6	Commercial calibration with test results data
N6710A-1A7	ISO 17025 Cal Certificate

Ordering Information

Modules

Modules are ordered as options to the N6710A. Modules are not orderable individually. To order a module as an option to an N6710A, specify its model number, followed by “-ATO”. For example, to order an N6731A as an option to the N6710A, you would specify “N6731A-ATO” as the option.

When ordering options to the modules, you can individually specify each option for each module. For example, you can order the first module with Option 761 Output Disconnect Relays, while the remaining modules have no relay option.

Module options for N6710A System

N6730 50 W

DC Power Modules

N6731A-ATO	5 V, 10 A, 50 W DC Power Module
N6732A-ATO	8 V, 6.25 A, 50 W DC Power Module
N6733A-ATO	20 V, 2.5 A, 50 W DC Power Module
N6734A-ATO	35 V, 1.5 A, 50 W DC Power Module
N6735A-ATO	50 V, 0.8 A, 40 W DC Power Module

Available options to N673xA modules

N673xA-ATO-761	Output Disconnect Relays
-----------------------	--------------------------

N6740 100 W

DC Power Modules

N6742A-ATO	8 V, 10 A, 80 W DC Power Module
N6743A-ATO	20 V, 5 A, 100 W DC Power Module
N6744A-ATO	35 V, 3 A, 100 W DC Power Module
N6745A-ATO	50 V, 1.6 A, 80 W DC Power Module

Available options to N674xA modules

N674xA-ATO-761	Output Disconnect Relays
-----------------------	--------------------------

N6750 High-Performance, Autoranging DC Power Modules

N6751A-ATO	50 V, 5 A, 50 W High-Performance Autoranging DC Power Module
N6752A-ATO	50 V, 10 A, 100 W High-Performance Autoranging DC Power Module

Available options to N675xA modules

N675xA-ATO-761	Output Disconnect Relays
N675xA-ATO-054	High-Speed Test Extensions

N6760 Precision

DC Power Modules

N6761A-ATO	50 V, 5 A, 50 W Precision DC Power Module
N6762A-ATO	50 V, 10 A, 100 W Precision DC Power Module

Available options to N676xA modules

N676xA-ATO-761	Output Disconnect Relays
<standard>	High-Speed Test Extensions are included on all N676xA modules

Ordering Information

Preconfigured N672x Systems

If you would like to take advantage of the size and speed of the N6700, Agilent offers preconfigured N6700 Modular Power Systems to replace Agilent 662xA Power Supplies. Rather than ordering an N6710A system with multiple options for modules, to simplify ordering, the N672xA model numbers are available as single model number preconfigured replacements. However, if you need to add capabilities not offered in these preconfigured models (for example, adding Output Disconnect Relays), use the N6710A Build-to-Order System number to create other configurations of modules and options.

Preconfigured Systems to replace 662x Power Supplies

N6721A	6621A Replacement
N6722A	6622A Replacement
N6723A	6623A Replacement
N6724A	6624A Replacement
N6725A	6625A Replacement
N6726A	6626A Replacement
N6727A	6627A Replacement
N6728A	6628A Replacement
N6729A	6629A Replacement

Preconfigured Systems to replace 662x Power Supplies

Available options to N672xA	
N672xA-908	Rack Mount Kit (Required for rack mounting; Standard rack mount hardware will not work.)
N672xA-0L1	Standard Documentation Kit
N672xA-0L2	Additional copy of Standard Documentation Kit
N672xA-0B0	Delete Standard Documentation Kit
N672xA-900	Power Cord, United Kingdom, P/N 8120-1351
N672xA-901	Power Cord, Australia, P/N 8120-1369
N672xA-902	Power Cord, Europe, P/N 8120-1689
N672xA-903	Power Cord, USA, Canada, P/N 8120-4383
N672xA-904	Power Cord, USA, Canada, P/N 8120-0698
N672xA-906	Power Cord, Switzerland, P/N 8120-2104
N672xA-912	Power Cord, Denmark, P/N 8120-2956
N672xA-917	Power Cord, South Africa, India, P/N 8120-4211
N672xA-918	Power Cord, Japan, P/N 8120-4753
N672xA-919	Power Cord, Israel, P/N 8120-6800
N672xA-920	Power Cord, Argentina, P/N 8120-6869
N672xA-921	Power Cord, Chile, P/N 8120-6980
N672xA-922	Power Cord, China, P/N 8120-8376
N672xA-927	Power Cord, Thailand, P/N 8120-8871
N672xA-UK6	Commercial calibration with test results data
N672xA-1A7	ISO 17025 Cal Certificate

Ordering Information (Continued)

Original Model Number	New Replacement Model Number	Consists of	N6751A 50 V, 5 A, 50 W High-Performance Autoranging DC Power Module	N6752A 50 V, 10 A, 100 W High-Performance Autoranging DC Power Module	N6761A 50 V, 1.5 A, 50 W Precision DC Power Module	N6762A 50 V, 3 A, 100 W Precision DC Power Module
6621A	N6721A	= N6700A +		2		
6622A	N6722A	= N6700A +		2		
6623A	N6723A	= N6700A +	2	1		
6624A	N6724A	= N6700A +	4			
6625A	N6725A	= N6700A +			1	1
6626A	N6726A	= N6700A +			2	2
6627A	N6727A	= N6700A +	4			
6628A	N6728A	= N6700A +				2
6629A	N6729A	= N6700A +				4

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, while your instrument is under warranty or technical support contract. Many self-help tools are available on Agilent's web site.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 800 829 4444

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 0800 650 0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) 305 269 7500
(fax) 305 269 7599

Taiwan:
(tel) 080 004 7866
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:
(tel) (65) 375 8100
(fax) (65) 836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice. For latest and complete specifications, refer to the N6700 User's Guide, Agilent part number 5969-2908. The web contains the most up-to-date version of the User's Guide. Go to <http://www.agilent.com/find/N6700>.

© Agilent Technologies, Inc. 2004
Printed in the USA May 1, 2004
5989-0489EN



Agilent Technologies